

We are
YOUR SOLUTION

Features

1. R58.03 certified
2. KTL surface treatment
3. Available with mechanical, electrical and hydraulic operation
4. Three available length variants: 400-670-850mm
5. Sideband protection with ECE R104 contour marking
6. Various mounting options
7. The extendable underrun bar can be mounted from 758 mm to a maximum of 1400 mm width on the chassis.
8. Available as fully boltable
9. Delivered as a kit

TERBERG TECHNIEK


Industrieweg 9-10
3401 MA IJSSELSTIJN

☎: +31 30 600 62 60

✉: stootbalk.technik@terberg.com
www.terbergtechnik.nl

ADJUSTABLE UNDERRUN BAR

R58-03 CERTIFIED

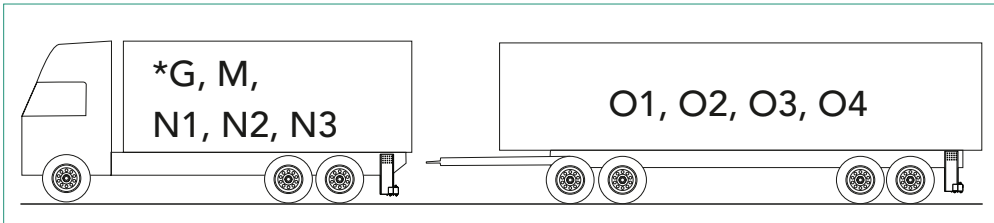


	A=MAX	
	300	 *G, N2 (>8T), N3, O3, O4
	200	O3, O4
	400-δ	M, N1, N2 (<8T), O1, O2

B=MAX			
	450	 *G, N2 (>8T), N3, O3, O4	
	500	 *G, N2 (>8T), N3, O3, O4	
	550	M, N1, N2 (<8T), O1, O2	

*Categorie G heeft aparte positioneringsregels

Sideplates

Our sideplates are available in a wide range both in weldable and boltable variants in L-, U- and Z-shaped versions. L- and Z-shaped sideplates can be mounted as either left or right. The drilling pattern of the non-predrilled sideplates has to be minimum 4x4 or 3x5.

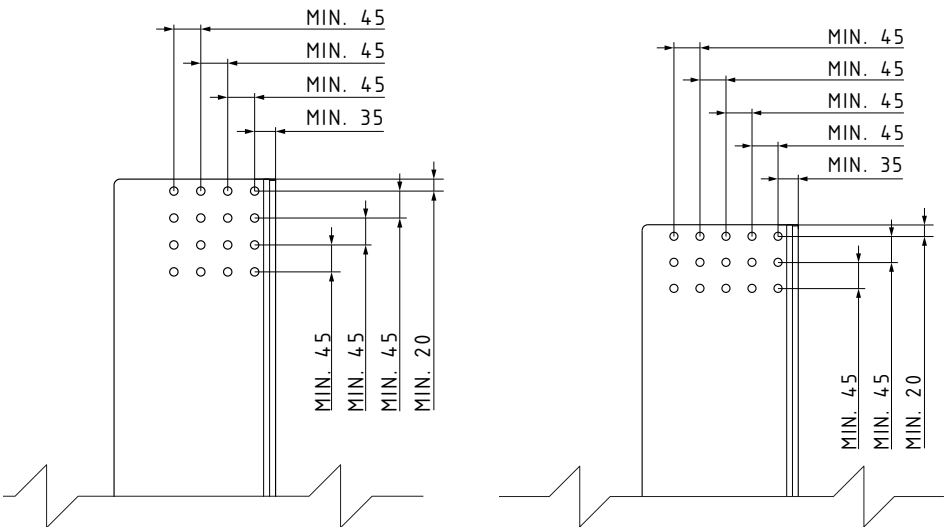

TECHNICAL SPECIFICATIONS MHE856740		400 [mm]	670 [mm]	850 [mm]
Mechanical		48867	48890	48885
Electrical		48869	48892	48887
Hydraulic		48868	48891	48886
Dimensions, closed (b*d*h)	[mm]	2408x222x144		
Dimensions, open (b*d*h)	[mm]	2408x622x144	2408x892x144	2408x1072x144
Weight, (mechanical)	[kg]	132	137	141
Weight, (electric, hydraulic)	[kg]	143	148	152
Chassiswidth (min–max)	[mm]	758–1400		
Certified according to directive		E4*58R03/00*0899*03		
Weight can deviate +/- 5%, including KTL treatment and excluding the bolt connections for mounting the extendable underrun bar to the chassis. No rights can be derived from the data in the table. Subject to changes and typing errors.				

Pre-welded, bolt on sideplates

	BRAND	SIDEPLATE HEIGHT			
		295 [mm]	325 [mm]	375 [mm]	410 [mm]
		RELATED PART NUMBERS (LEFT-RIGHT)			
	DAF	93786-93785	93822-93823	93820-93821	93824-93825
	IVECO	93804-93803	93802-93801	93800-93799	✗
	MAN	93798-93797	93796-93795	93794-93793	✗
	Mercedes-Benz (air suspension only!)	94862-94863	94864-94865	94866-94867	94868-94869
	SCANIA	93813-93812	93808-93807	93806-93805	✗
	VOLVO	93819-93818	93817-93816	93815-93814	✗

Weldable sideplates (DIY)

	TYPE	SIDEPLATES		
		RELATED PART NUMBERS (LEFT-RIGHT)		
	L-VORMIG	46232-46233	46240-46241	2x 48712+48709+2x 48714 (HEA beam)
	U-VORMIG	46230-46231	46236-46237	
	Z-VORMIG	46234-46235		

Bolt on sideplates

	MERK	SIDEPLATE HEIGHT			
		295 [mm]	325 [mm]	375 [mm]	UNIVERSAL
		RELATED PART NUMBERS (LEFT-RIGHT)			
	Mercedes-Benz (air- and leafsuspension)	48852-48853	48854-48855	48856-48857	48801-48802
		Combined with: • 2x 48804 (mounting bracket) + • 6x 92196 (stud plate)			